

OT LIGHTING SURGICAL TABLES

Designed and developed for the most advanced performance, surgeon control, positioning & durability.




MAKE IN
INDIA



www.aryamedindia.com



Industry-Focused Areas of Expertise

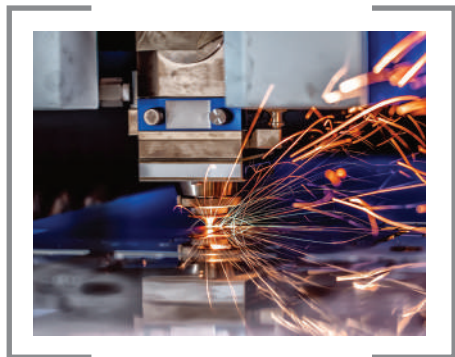

International quality and environment-friendly standards at every step of the manufacturing process.

MAKE IN
INDIA



Why Choose Aryamed?

ARYAMED specializes in manufacturing Operation Theatre Lights (OT Lights) and Operation Theatre Tables (OT Tables) in India. Due to its specialized research-driven production capabilities, ARYAMED has created a niche for itself in the domestic as well as international medical industry. ARYAMED's Operation Theatre Lights (OT Lights) and Operation Theatre Tables (OT Tables) are sold across India and in regions Europe, Middle East, South America, Africa and South-East Asia.

Quality and Reliability

We follow international quality and environment-friendly standards at every step of the manufacturing process. This gives us the ability to design and sell the most sophisticated and technological latest products in the service of the medical profession. Our Research and Development department is continuously involved in designing & developing better design and technical solutions to improve our Operation Theatre Lights (OT Lights) and Operation Theatre Tables (OT Tables).

Global Supply

Our manufacturing facility is located in Delhi, India. It is equipped with the latest machinery and all the work is done in-house. We endeavour to continuously improve the production quality as well the production quantity of our Operation Theatre Lights (OT Lights) and Operation Theatre Tables (OT Tables). We have a team of experts consisting of technicians, engineers, quality-control professionals, and related staff who take into consideration the changing trends and latest technology including market demands while manufacturing the range of products. Our staff works like family in an amiable environment to make our vision a reality.

INDEX

LED OT LIGHTS

PROLUX	
PROLUX 500	1
PROLUX 400	1
PROLUX 200+200	2
ULTRA	
ULTRA 6+6	2
ULTRA 4+4	3
ULTRA 4	3
HILUX	
HILUX 126+126	4
HILUX 105	4
HILUX 84+84	5
HILUX 63	5
HILUX 5	6
HILUX 4+4	6
HILUX 4+4 (14 LED)	7
HILUX 4 (14 LED)	7
COSMO	
COSMO 4+4	8
COSMO 4	8
LED EXAMINATION LIGHTS	
EL-HILUX	9
EL-FLAIR	9
AMI-07	10

SURGICAL TABLES

ELECTRIX ELECTRIC OT TABLE	11
ELECTRIX ADVANCE ELECTRIC OT TABLE	12
AMI A1 C-ARM COMPATIBLE ELECTRIC OT TABLE	14
AMI A1 ADVANCE C-ARM COMPATIBLE ELECTRIC OT TABLE	15
AMI A2 C-ARM COMPATIBLE HYDRAULIC OT TABLE	16
AMI A2 EL C-ARM COMPATIBLE SEMI-ELECTRIC OT TABLE	17
AMI A3 GENERAL SURGERY OT TABLE HYDRAULIC	18
AMI A3 EL GENERAL SURGERY OT TABLE SEMI-ELECTRIC	18
AMI A4 SLIDING TOP ELECTRIC OT TABLE	19
AMI A4 ADVANCE ELECTRIC OT TABLE WITH SLIDING TOP	20
AMI A5 NEURO ATTACHMENT	21
AMI A6 ALBEE'S TYPE ORTHO ATTACHMENT	22
AMI A6 HANGING TYPE ORTHOPEDIC ATTACHMENT	23
AMI A7 OPHTHALMIC ELECTRIC OT TABLE	24
AMI A8 EL ELECTRIC GYNECOLOGICAL OBSTETRIC OT TABLE	25
AMI A8 HYDRAULIC GYNECOLOGICAL OBSTETRIC OT TABLE	25
AMI A9 DERMA CHAIR	26
AMI A10 ELECTRIC ANIMAL OPERATING TABLE	27
STANDARD ACCESSORIES	28
OPTIONAL ACCESSORIES	29



PROLUX 500

Adjustable Colour Temperature

Memory Function
Endo Mode



OPTIONAL

-  Battery Backup
-  360° Rotation

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. Body is made of high quality fire resistant polymer.
Single non winged round shape lamp head for easy maintenance and better sealing against dust and fumigation.

TECHNICAL DATA

Intensity	1,60,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	126
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable
Monitor / Camera	Optional



Mobile Model

Mobile Model
with battery backup



PROLUX 400

Adjustable Colour Temperature

Memory Function
Endo Mode



OPTIONAL

-  Battery Backup
-  360° Rotation

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. Body is made of high quality fire resistant polymer.
Single non winged round shape lamp head for easy maintenance and better sealing against dust and fumigation.

TECHNICAL DATA

Intensity	1,60,000 Lux ±10%
Size of Light Field	15 cm
Colour Temperature	3800-4800K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	48
Diameter of Light	700 mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable
Monitor / Camera	Optional



Mobile Model

Mobile Model
with battery backup

PROLUX 200+200

OPTIONAL

 Battery Backup

Shadowless Light, Body is made of high quality fire resistant polymer.
Single non winged round shape lamp head for easy maintenance and better sealing against dust and fumigation.

TECHNICAL DATA

Intensity	80,000 + 80,000 Lux \pm 10%
Size of Light Field	15 cm
Colour Temperature	4500 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	28 +28
Diameter of Light	200mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White
Focusing	Fixed



ULTRA 6+6

Adjustable Colour Temperature

Memory Function
Endo Mode

OPTIONAL

 Battery Backup

 360° Rotation

TECHNICAL DATA


Intensity	1,60,000 + 1,60,000 \pm 10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	126 +126
Diameter of Light	600mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable




Shadowless Light, Memory Function, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

ULTRA 4+4

Adjustable Colour Temperature
Memory Function
Endo Mode

- OPTIONAL
- 
Battery Backup


360° Rotation



Shadowless Light, Memory Function, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

TECHNICAL DATA

Intensity	1,30,000 + 1,30,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	84 +84
Diameter of Light	600mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

ULTRA 4

Adjustable Colour Temperature
Memory Function
Endo Mode



- OPTIONAL
- 
Battery Backup

TECHNICAL DATA

Intensity	1,30,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	84
Diameter of Light	600mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup



Shadowless Light, Memory Function, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

HILUX 126+126

Adjustable Colour Temperature

Memory Function
Endo Mode

OPTIONAL

-  **Battery Backup**
-  **360° Rotation**



TECHNICAL DATA

Intensity	1,60,000 + 1,60,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	126 +126
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Easily detachable connector based OT Light / Optional

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

HILUX 105

Adjustable Colour Temperature

Memory Function
Endo Mode



OPTIONAL

-  **Battery Backup**

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

TECHNICAL DATA

Intensity	1,50,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	105
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Easily detachable connector based OT Light / Optional



Mobile Model



**Mobile Model
with battery backup**

HILUX 84+84

Adjustable Colour Temperature

Memory Function
Endo Mode

OPTIONAL

-  Battery Backup
-  360° Rotation

TECHNICAL DATA

Intensity	1,30,000 + 1,30,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	84 +84
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Easily detachable connector based OT Light / Optional



Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

HILUX 63

Adjustable Colour Temperature

Memory Function
Endo Mode

OPTIONAL

-  Battery Backup

TECHNICAL DATA

Intensity	90,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	63
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Easily detachable connector based OT Light / Optional



Mobile Model

Mobile Model
with battery backup

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

HILUX 5

Adjustable Colour Temperature

Memory Function

Endo Mode



OPTIONAL

 Battery Backup

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

TECHNICAL DATA

Intensity	1,40,000 Lux \pm 10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	95
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

HILUX 4+4

Adjustable Colour Temperature

Memory Function

Endo Mode

OPTIONAL

 Battery Backup



TECHNICAL DATA

Intensity	1,10,000 + 1,10,000 Lux \pm 10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	76 + 76
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Shadowless Light, Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

HILUX 4+4 (14 LED)

Adjustable Colour Temperature

OPTIONAL

-  Battery Backup
-  All White LED



TECHNICAL DATA

Intensity	1,10,000 + 1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	70 +70
Diameter of Light	500mm x 2
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable

Shadowless Light, Memory Function, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

HILUX 4 (14 LED)

Adjustable Colour Temperature

OPTIONAL

-  Battery Backup
-  All White LED



TECHNICAL DATA

Intensity	1,10,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	56
Diameter of Light	500mm
Brightness Control	Capacitive Touch Panel
Power Supply	220V/50Hz AC
Colour of LED	White & Yellow (Double Colour)
Focusing	Adjustable



Mobile Model

Mobile Model
with battery backup

COSMO 4+4

OPTIONAL

-  Battery Backup
-  All White LED

TECHNICAL DATA

Intensity	100,000 + 100,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	56 + 56
Diameter of Light	500mm x 2
Power Supply	220V/50Hz AC
Focusing	Adjustable



Shadowless Light, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer. With Dual Colour LED White and Yellow.

COSMO 4

OPTIONAL

-  Battery Backup
-  All White LED

TECHNICAL DATA

Intensity	100,000 ±10%
Size of Light Field	12-30 cm
Colour Temperature	4000-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	56
Diameter of Light	500mm
Power Supply	220V/50Hz AC
Focusing	Adjustable



Shadowless Light, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer. With Dual Colour LED White and Yellow.



Mobile Model

Mobile Model with battery backup

EL-HILUX

OPTIONAL

 Battery Backup



TECHNICAL DATA

Intensity	45,000 Lux \pm 10%
Size of Light Field	125mm
Colour Temperature	4500-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	14
Brightness Control	Touch
Diameter of Light	150mm
Power Supply	220V/50Hz AC



Wall Mounted

Wall Mounted with
Extended Rod

Note: Also available Table Mounted

Shadowless Light, With special European design for ventilation of heat. Body is made of high quality fire resistant polymer. With Dual Colour LED White and Yellow.

EL-FLAIR

OPTIONAL

 Battery Backup



TECHNICAL DATA

Intensity	45,000 Lux \pm 10%
Size of Light Field	125 mm
Colour Temperature	4500-5000 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	14
Brightness Control	Touch
Diameter of Light	150 mm
Power Supply	220V/50Hz AC



Wall Mounted

Wall Mounted with
Extended Rod

Note: Also available Table Mounted

Shadowless Light, High quality sterilizable handle. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer. With Dual Colour LED White and Yellow.

AMI-07

OPTIONAL

 Battery Backup

TECHNICAL DATA

Intensity	25,000 Lux \pm 10%
Size of Light Field	100 mm
Colour Temperature	4800 K
Colour Rendering Index	93 RA
LED Life	>50000 Hrs.
Number of LED	7
Diameter of Light	125 mm
Power Supply	220V/50Hz AC



Wall Mounted

Wall Mounted with
Extended Rod

Shadowless Light, With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.

Note: Also available Table Mounted



ELECTRIX

ELECTRIC OT TABLE



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

- We are providing SMPS based control box which can handle better Voltage Fluctuations, When SMPS is idle there is zero current consumption and saves power. These are as per new European and American standards where the idle power consumption should be zero and where transformer based system are outdated.
- We provide remote which is ergonomically designed to have an easy and better grip with spiral cable and it has LED backlit switch with symbolic position figures making it convenient to use even in the dark.
- We provide zero position facility i.e by pressing the single button OT Table will come to normal position.
- We provide patient reverse orientation mode when head and leg section are interchanged.
- We provide 2 memory function in control panel.
- We provide indication of battery back in the second handset.
- The Handset is designed with Back LED Indicator for better visibility.
- Head and foot section is manually operated by the means of Ratchet System.
- We provide Stainless steel Covered Base and Column Covers for easy cleaning and hygiene.
- We provide Anti Bacterial and Anti Fungal Mattress.
- The motion of table is easy with double swivel castors 100mm diameter, in which 2 castors having brakes.

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	+20°
Back Section	+70°
Head Section	+60°
Leg Section	0°-90°
Floor Locking System	Center Floor Locking

SALIENT FEATURES

- Center Pillar • Stainless Fitting - Detachable, head, leg & Pelvic section • In built kidney bridge • Five Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel. • Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning. • Standby Battery Back-up with recharging circuit.

ELECTRIX ADVANCE

ELECTRIC OT TABLE



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

- We are providing SMPS based control box which can handle better Voltage Fluctuations, When SMPS is idle there is zero current consumption and saves power. These are as per new European and American standards where the idle power consumption should be zero and where transformer based system are outdated.
- We provide remote which is ergonomically designed to have an easy and better grip with spiral cable and it has LED backlit switch with symbolic position figures making it convenient to use even in the dark.
- We provide zero position facility i.e by pressing the single button OT Table will come to normal position.
- We provide patient reverse orientation mode when head and leg section are interchanged.
- We provide 2 memory function in control panel.
- We provide indication of battery back in the second handset.
- The Handset is designed with Back LED Indicator for better visibility.
- Head and foot section is manually operated by the means of Ratchet System.
- We provide Stainless steel Covered Base and Column Covers for easy cleaning and hygiene.
- We provide Anti Bacterial and Anti Fungal Mattress.
- The motion of table is easy with double swivel castors 100mm diameter, in which 2 castors having brakes.

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	+20°
Back Section	+70°
Head Section	+60°
Leg Section	0°-90°
Floor Locking System	Center Floor Locking

SALIENT FEATURES

- Sliding Top • Split Leg Section • Center Pillar • Stainless Fitting - Detachable, head, leg & Pelvic section • In built kidney bridge • Five Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel. • Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning. • Standby Battery Back-up with recharging circuit.



HEIGHT ADJUSTMENT - DOWN



HEIGHT ADJUSTMENT - UP



LATERAL TILT - LEFT



LATERAL TILT - RIGHT



TRENDLENBURG



REVERSE TRENDLENBURG



FLEX POSITION



GYNEC POSITION

AMI A1
C-ARM COMPATIBLE ELECTRIC OT TABLE



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

- Enccentric Pillars
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- In built kidney bridge
- Five Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- Standby Battery Back-up with recharging circuit.




TABLE POSITIONS

- Height Adjustment - Up & Down
- Lateral Tilt - Left & Right
- Trendelenburg & Reverse Trendelenburg
- Flex Position & Reflex Position

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

OPTIONAL

- 
Floor Locking by Remote
- 
Low Height
- 
Manual Override

AMI A1 ADVANCE

C-ARM COMPATIBLE ELECTRIC OT TABLE

 **Memory Function**

 **Additional Control Panel**

 **Zero Position**



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

- We are providing first SMPS based control Box.
- Can handle better Voltage Fluctuations.
- When idle has zero current consumption and saves power, these are as per new European and American Standards where the idle power consumption should be zero and where Transformer based systems are outdated
- We are providing a Handset and Additional control panel
- Indication of Battery Back provided in the second handset.
- The Control panel has 2 memory functions.
- The second handset has also safety key to lock the complete handset
- The Handset is designed with Back LED Indicator for better visibility.
- This is the only handset with Backlight features

TABLE POSITIONS

- Height Adjustment - Up & Down
- Lateral Tilt - Left & Right
- Trendelenburg & Reverse Trendelenburg
- Flex Position & Reflex Position

SALIENT FEATURES

- Eccentric Pillars • Stainless Fitting • Detachable, head, leg & Pelvic section • In built kidney bridge
- Five Sectional Radio - Translucent Top. • Base & Cover made of attractive, easy to clean Stainless Steel. • Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning. • Standby Battery Back-up with recharging circuit.

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

OPTIONAL

 **Floor Locking by Remote**

 **Low Height**

 **Manual Override**

AMI A2

C-ARM COMPATIBLE HYDRAULIC OT TABLE



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

- Eccentric Pillars
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- In built kidney bridge
- Five Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

AMI A2 EL
C-ARM COMPATIBLE SEMI-ELECTRIC OT TABLE



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

- SPECIAL FEATURES

 - Electric up & down by cable remote
 - Eccentric Pillars
 - Stainless Fitting
 - Detachable, head, leg & Pelvic section
 - In built kidney bridge
 - Five Sectional Radio - Translucent Top.
 - Base & Cover made of attractive, easy to clean Stainless Steel.
 - Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.

TECHNICAL DATA


Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

OPTIONAL


Battery Backup


AMI A3

GENERAL SURGERY OT TABLE HYDRAULIC

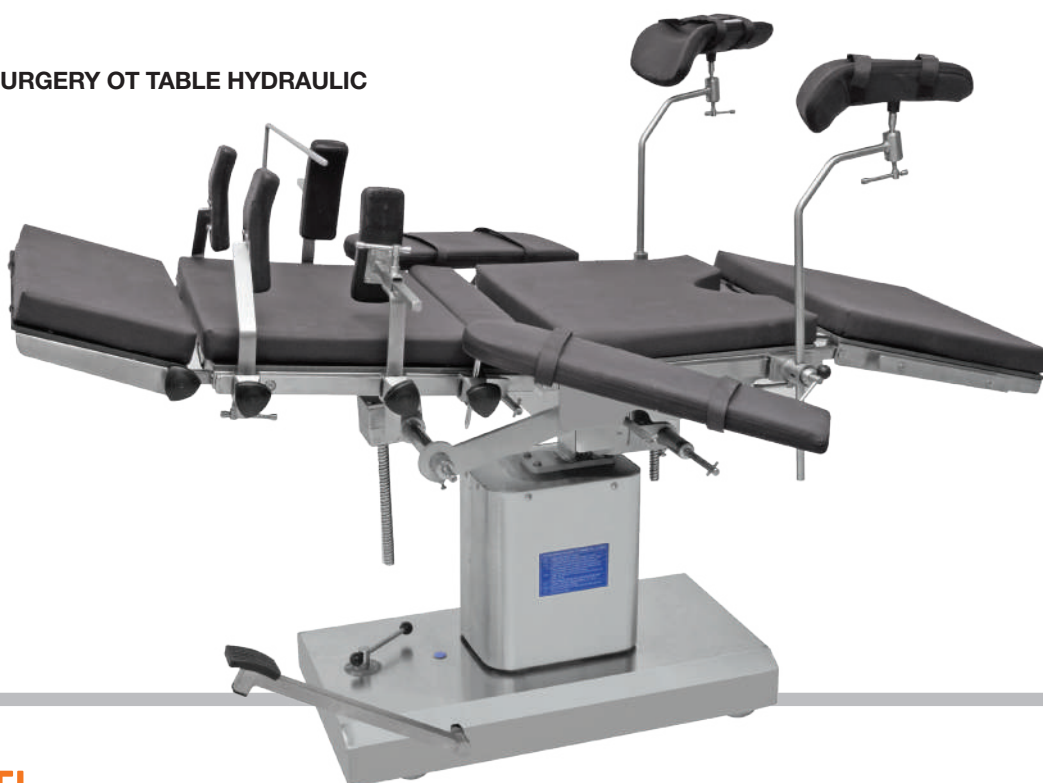

AMI A3 EL

GENERAL SURGERY OT TABLE SEMI-ELECTRIC

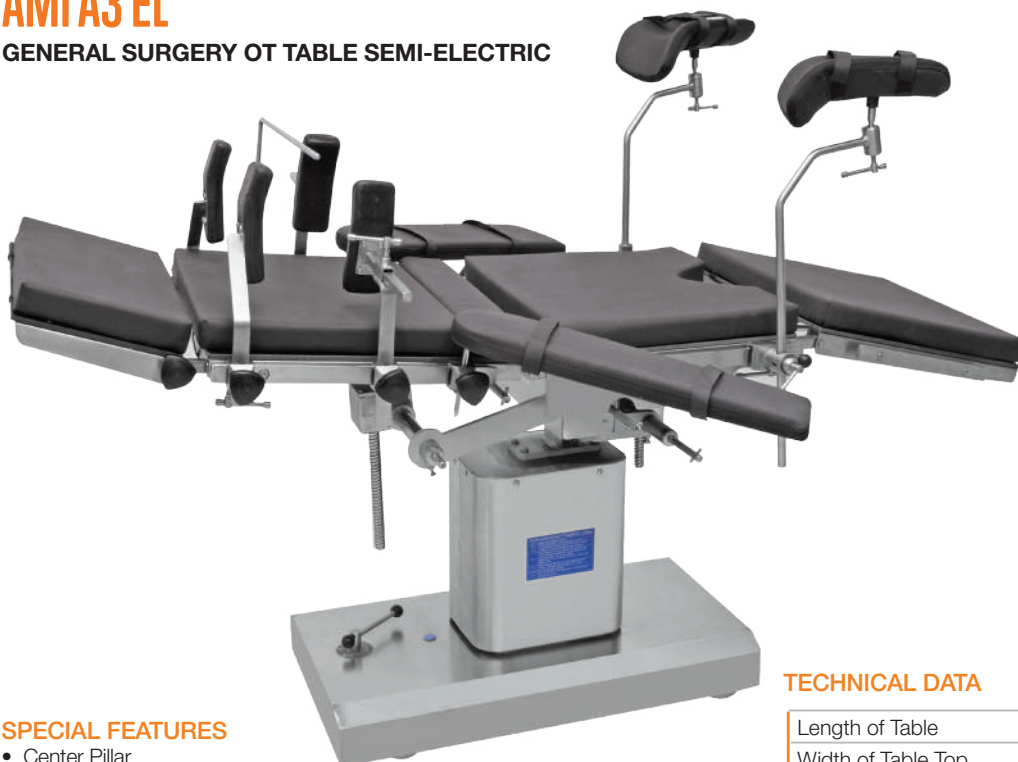

ELECTRIC UP & DOWN

OPTIONAL

 **Battery Backup**

SPECIAL FEATURES

- Center Pillar
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- In built kidney bridge
- Five Sectional Radio - Translucent.
- Base & Cover made of attractive, east to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±70°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

AMI A4

SLIDING TOP ELECTRIC OT TABLE

 Sliding Top



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

This Electromatic sliding top O.T Table is suitable for all kind of surgeries, i.e. general surgery, vascular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Grade - 304). Non-reflecting surface, antibacterial & easy to clean. We provide with a top sliding of 5inch back/forward. Height adjustment, Lateral Tilts, Trendelenburg, and Flex - Reflex, Chair Position and Longitudinal Sliding top are realized by Remote control.

TABLE POSITIONS

- Height Adjustment - Up & Down
- Lateral Tilt - Left & Right
- Trendelenburg & Reverse Trendelenburg
- Flex Position & Reflex Position

SALIENT FEATURES

- Eccentric Pillars • Stainless Fitting • Detachable, head, leg & Pelvic section • Four Sectional Radio - Translucent Top. • Base & Cover made of attractive, easy to clean Stainless Steel. • Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning. • Standby Battery Back-up with recharging circuit.

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±20°
Head Section	±60°
Leg Section	0°-90°
Top Sliding	5" Reverse & 5" Forward

OPTIONAL

 Floor Locking by Remote

 Low Height

AMI A4 ADVANCE

ELECTRIC OT TABLE WITH SLIDING TOP

 **Memory Function**

 **Additional Control Panel**

 **Zero Position**



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

This Electromatic sliding top O.T Table is suitable for all kind of surgeries, i.e. general surgery, vascular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Grade - 304). Non-reflecting surface, antibacterial & easy to clean. We provide with a top sliding of 5inch back/forward. Height adjustment, Lateral Tilts, Trendelenburg, and Flex - Reflex, Chair Position and Longitudinal Sliding top are realized by Remote control.

TABLE POSITIONS

- Height Adjustment - Up & Down
- Lateral Tilt - Left & Right
- Trendelenburg & Reverse Trendelenburg
- Flex Position & Reflex Position

SALIENT FEATURES

- Eccentric Pillars
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- Four Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- Standby Battery Back-up with recharging circuit.

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±20°
Head Section	±60°
Leg Section	0°-90°
Top Sliding	5" Reverse & 5" Forward

OPTIONAL



Floor Locking by Remote



Low Height

AMI A5

NEURO ATTACHMENT



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

We are ranked as one of the leading manufacturers, suppliers, exporters, traders and distributors of excellent quality Neuro Surgery Attachments. These neuro surgery attachments provide neuro surgeons stable and excellent support as they perform different medical procedures. These neuro surgery attachments are very durable made from excellent quality stainless steel and other materials. We provide ophthalmologic procedures using the narrow headrest, neurology procedures in prone position and supine position (Sugita six pin fixator and Horse Shoe).



HORSE SHOE POSITION



**SUGITA HEAD FIXATOR
FOR SUPINE POSITION & SKULL PINS**

AMI A6

ALBEE'S TYPE ORTHO ATTACHMENT



SPECIAL FEATURES

Ortho Attachment allows the table to be used for the lower extremity procedures. Available at competitive prices our ortho attachment is purely made of stainless steel which resist corrosion.

- The Orthopedic Attachment can be used with any operating table.
- In addition, a pelvic support plate is supported on top of the frame and is formed with an asymmetrical construction.
- Stirring Instruments allows flexion/raising of legs & stirring/string ball joints locked from foot end.
- Two traction devices on sliding spot with ball joint allowing flexions & rotations of foot with traction shoe with metallic sole.
- Padded orthopedic knee crutches/provides support to the legs of the patient.



PATIENT POSITIONING FOR NECK OF FEMUR NAILING TRACTION (D.H.S)




FEMUR TREATMENT IN LATERAL POSITION



TIBIA EXTENSION POSITION

AMI A6

HANGING TYPE ORTHOPEDIC ATTACHMENT

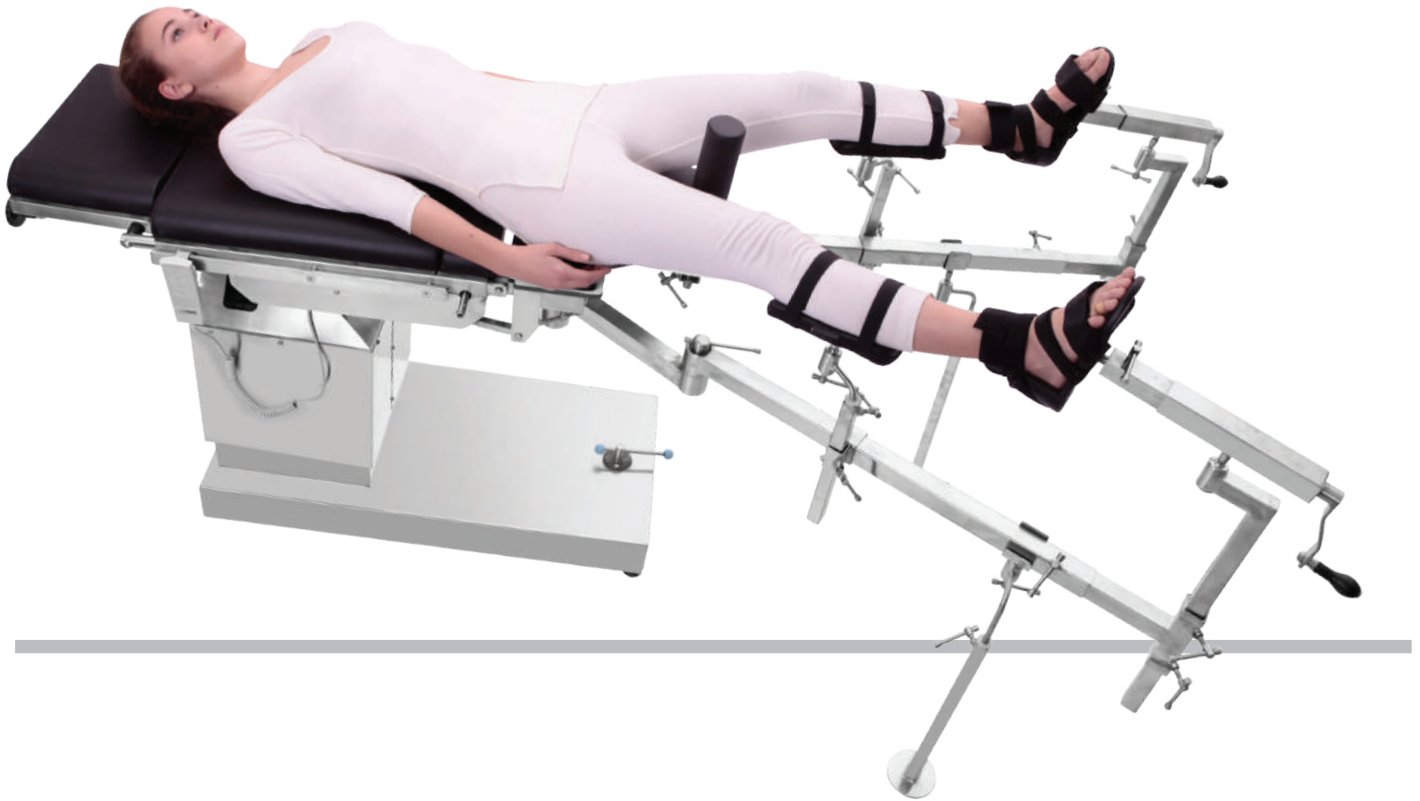


SPECIAL FEATURES

Ortho Attachment allows the table to be used for the lower extremity procedures. Available at competitive prices our ortho attachment is purely made of stainless steel which resist corrosion.

- The Orthopedic Attachment can be used with any operating table.
- In addition, a pelvic support plate is supported on top of the frame and is formed with an asymmetrical construction.
- Stirring Instruments allows flexion/raising of legs & stirring/string ball joints locked from foot end.
- Two traction devices on sliding spot with ball joint allowing flexions & rotations of foot with traction shoe with metallic sole.
- Padded orthopedic knee crutches/provides support to the legs of the patient.

AMI A7
 OPTHALMIC ELECTRIC OT TABLE

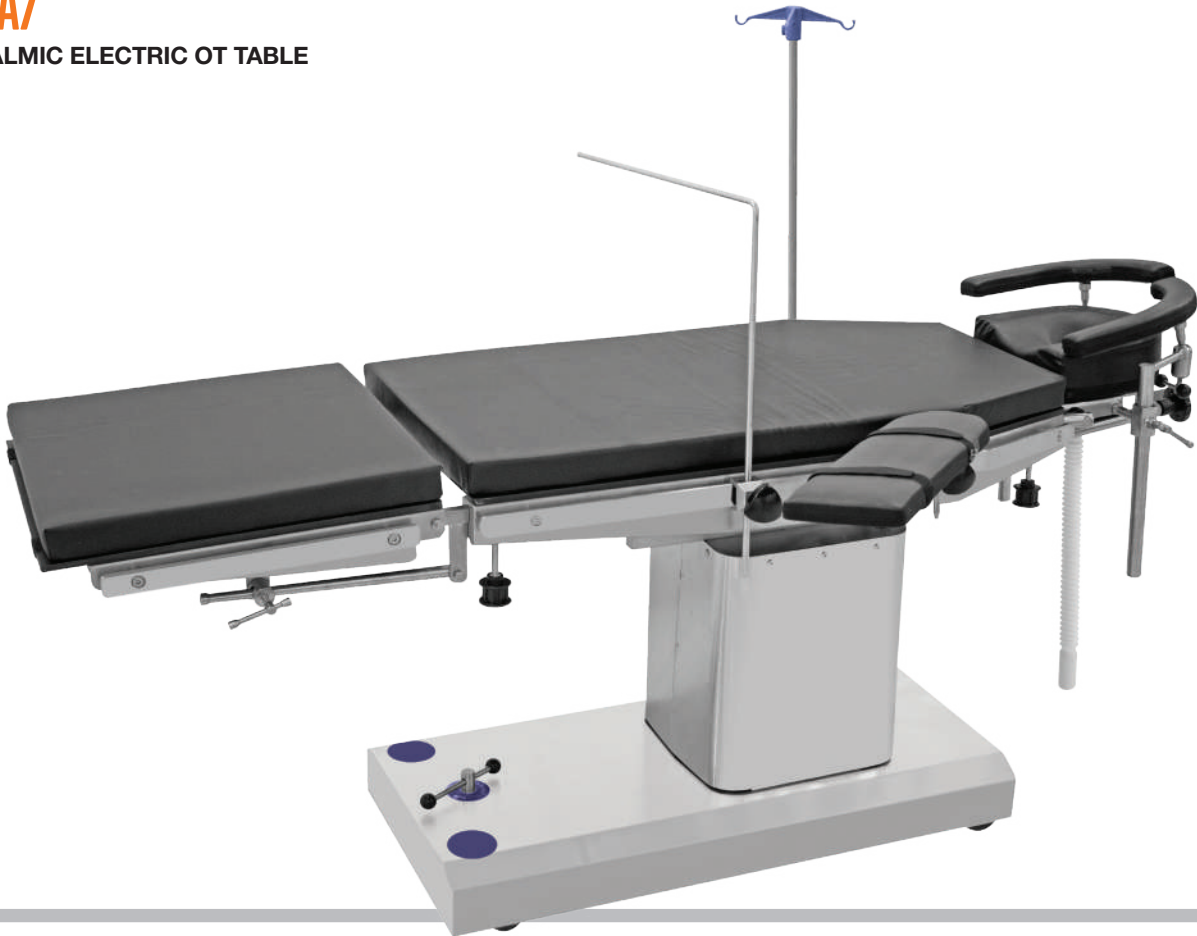

STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL


SPECIAL FEATURES
 This Ophthalmic Table is specially designed for ophthalmic surgery. Three sectional table is provided with drainage system in the head section. The table has sturdy base, column made up of stainless steel, antibacterial and is easy to clean. Electromotive height with the help of lightweight handheld control unit.


STANDARD ACCESSORIES

- Anesthetic Screen
- IV Pole
- Hand Rest
- Mattress

SALIENT FEATURES
 • Stainless Fitting • Detachable, head & leg section • Three Sectional Radio Translucent Top. • Base & Cover made of attractive, easy to clean Stainless Steel. • Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning

OPTIONAL

- 
 Battery Backup


 Up & Down By Hydraulic System

TECHNICAL DATA

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Leg Section	0°-90°



FOOT SWITCH (OPTIONAL)



INSTRUMENT TRAY (OPTIONAL)

AMI A8 EL

ELECTRIC GYNECOLOGICAL OBSTETRIC
OT TABLE

COLOUR OPTIONS



EXAMINATION &
BIRTHING POSITION

AMI A8
HYDRAULIC



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

OPTIONAL

 Battery Backup

SPECIAL FEATURES

Obstetrics operating room table perfect for all kinds of gynecological operations. The cover for base and column is made of 304 stainless steel, good performance on anti-rust and easy to clean.

STANDARD ACCESSORIES

- Arm Rest - 2 pcs.
- Birth Handle - 2 pcs.
- Mattress
- Gynae Tray

SALIENT FEATURES

- Functional and versatile
- Flexibility and precision
- Hygienic design
- Easy cleaning
- User-friendly

TECHNICAL DATA

Length of Table	1600 mm
Width of Table Top	550 mm
Minimum Height (without Mattress)	Min. 700 mm
Maximum Height (without Mattress)	Max. 950 mm
Trendelenburg	±20°
Back Section	±70°
Floor Locking System	Manual



GYNAE TRAY



BIRTHING HANDLE



FOOT SWITCH (OPTIONAL)

AMI A9

DERMA CHAIR



COLOUR OPTIONS



STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

- Luxurious Styling
- Multi-position section couch
- Suitable for all Dermatology, Cosmetology & Laser Surgery.
- Stable and professional design, unlike Saloon Chairs.
- Three independent motors - for Height, Leg Section & Back Section
- Elegant upholstery and all english colours

TECHNICAL DATA

Power	230 V 50 Hz
Size (mm)	2000 x 610 x 700
Weight	80 Kgs
Motors	3 independent
Remote	Provided

OPTIONAL




HEIGHT ADJUSTMENT - UP / DOWN



FOOT SWITCH (OPTIONAL)

AMI A10

ELECTRIC ANIMAL OPERATING TABLE

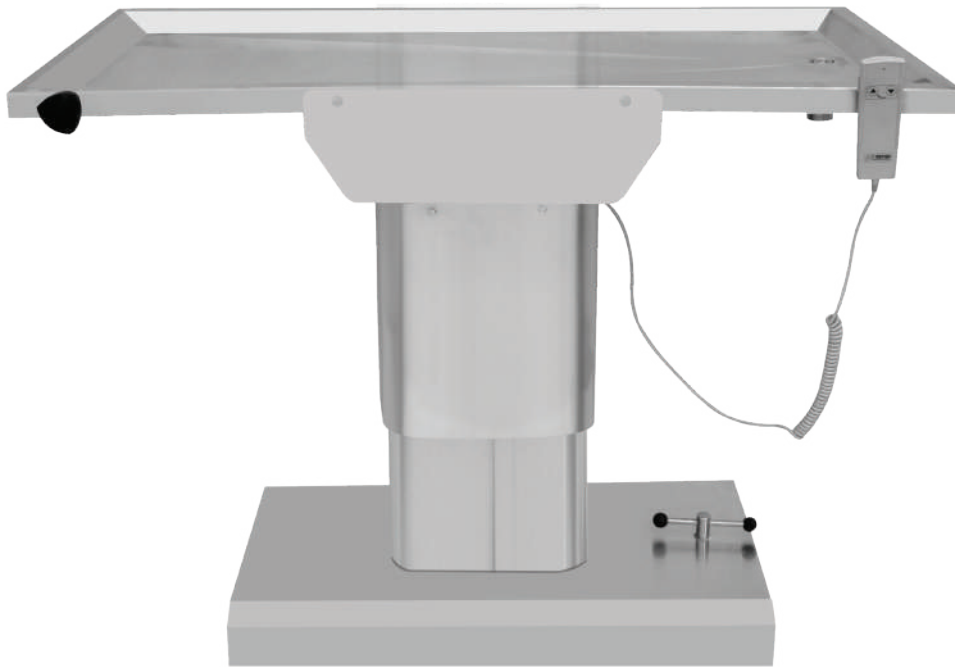

STEEL QUALITY 304 MEDICAL GRADE STAINLESS STEEL

SPECIAL FEATURES

- Electric up and down function.
- It is suitable for small animal's operation, such as sheep, dog etc.
- It is reasonable structured, tight, high performance, easy operation and has very strong practicability.
- Fully made of Premium Grade 304 Stainless Steel, it is heat-resistant, corrosion protective and rustproof.
- The surface of the table-top is V shaped and is smooth and easy to clean and disinfect, thus, it can avoid cross infection
- Equipped with fluid collecting through system.

TECHNICAL DATA

Length of Table	1220mm (48")
Width of Table	610mm (24")
Minimum Height	Min. 660 mm (26")
Maximum Height	Max. 915 mm (36")

STANDARD ACCESSORIES

- IV Pole
- Drainage Pipe

OPTIONAL



Battery Backup




Up & Down By Hydraulic System



FOOT SWITCH (OPTIONAL)

STANDARD ACCESSORIES

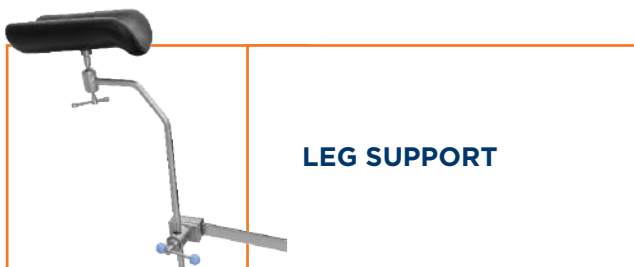

OPTIONAL ACCESSORIES



SPLIT LEG SECTION
QA-1



RESTRAINT BODY STRAP
OA-2



BOLSTER PILLOW
QA-3



INSTRUMENT TRAY
OA-4



FOOT SUPPORT
QA-5



CERVICAL IN SUPINE / LAMINECTOMY FRAME
OA-6



HUMERUS SUPPORT
QA-7




TABLE LENGTH EXTENSION
OA-8



STEINMANN PIN CLAMP HOLDER
QA-9



SPINE SURGERY USING CUSHION SPINE FRAME
OA-10



ARM TRACTION DEVICE / PERINEAL POST
QA-11



UROLOGY / GYNAE TRAY
OA-12



HORSE SHOE
QA-13



KNEE SUPPORT
OA-14

OPTIONAL ACCESSORIES



**FIXATOR FOR
SITTING POSITION**
QA-15



SHOULDER SURGERY
OA-16



**HAND SURGERY
TABLE**
QA-17



WIDTH EXTENSION
OA-18




**ARTHROSCOPY
ATTACHMENT**
QA-19



WRISTLET
QA-20



X-RAY TOP
allows for inserting X-ray film
cassette from head to foot
QA-21

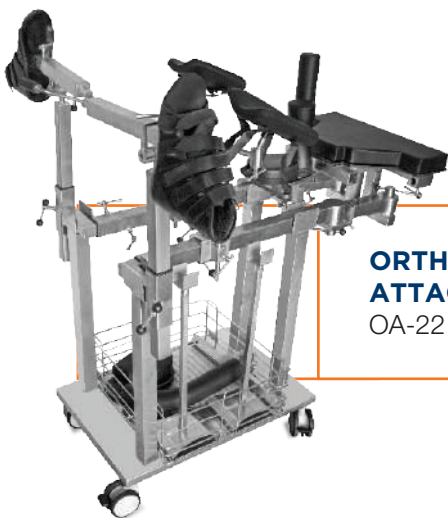


**ORTHOPAEDIC
ATTACHMENT STAND**
OA-22



**ACCESSORIES
STAND**
QA-23

NOTES

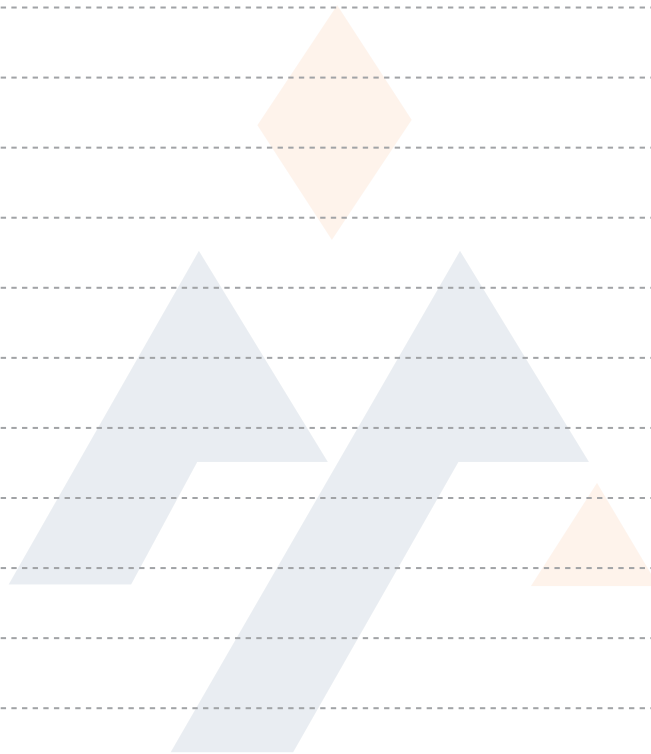

CERTIFICATIONS

ISO 13485:2016

Certificate of Registration

This is to certify that

ARYAMED INDIA
 ADDRESS : POCKET-H, PLOT NO.5,SECTOR 4,
 BANANA INDUSTRIAL COMPLEX, NEW DELHI-110039,INDIA

HAS BEEN ASSESSED AND FOUND TO BE IN ACCORDANCE WITH THE
 REQUIREMENTS OF THE QUALITY STANDARD

ISO 13485:2016

MEDICAL DEVICES MANAGEMENT SYSTEM

Applicable to:

Manufacturer And Supplier of Operation Theater Equipments :
 OT LIGHT
 LED OPERATION THEATER
 TABLE ELECTRICAL/HYDRAULIC/ELECTRO HYDRAULIC.
 HOSPITAL FURNITURE

Certificate Number : **2111MDS11**

Original Certification Date : 16-11-2021
 1st Surveillance Due on : 15-11-2022
 2nd Surveillance Due on : 15-11-2023
 Certificate Expiration Date : 15-11-2024






International Quality Services (IQS)
 20-22 Wexford Road London, N17 9JL United Kingdom of Great Britain and Northern Ireland | Website: www.iqs-uk.net

The validity of this certificate is contingent upon the condition that the client has understood & shall abide by contract agreement, certification agreement for certification services and logo rules as given on our website www.iqs-uk.net. The client is required to check the above certificate details at our above mentioned website and inform us in case of any discrepancy at our email id info@iqs-uk.net.

ISO 9001:2015

Certificate of Registration

This is to certify that

ARYAMED INDIA
 ADDRESS : POCKET-H, PLOT NO.5,SECTOR 4,
 BANANA INDUSTRIAL COMPLEX, NEW DELHI-110039,INDIA

HAS BEEN ASSESSED AND FOUND TO BE IN ACCORDANCE WITH THE
 REQUIREMENTS OF THE QUALITY STANDARD

ISO 9001:2015

QUALITY MANAGEMENT SYSTEM

Applicable to:

Manufacturer And Supplier of Operation Theater Equipments :
 OT LIGHT
 LED OPERATION THEATER
 TABLE ELECTRICAL/HYDRAULIC/ELECTRO HYDRAULIC.
 HOSPITAL FURNITURE

Certificate Number : **2111QMS10**

Original Certification Date : 16-11-2021
 1st Surveillance Due on : 15-11-2022
 2nd Surveillance Due on : 15-11-2023
 Certificate Expiration Date : 15-11-2024






International Quality Services (IQS)
 20-22 Wexford Road London, N17 9JL United Kingdom of Great Britain and Northern Ireland | Website: www.iqs-uk.net

The validity of this certificate is contingent upon the condition that the client has understood & shall abide by contract agreement, certification agreement for certification services and logo rules as given on our website www.iqs-uk.net. The client is required to check the above certificate details at our above mentioned website and inform us in case of any discrepancy at our email id info@iqs-uk.net.

CE CERTIFICATE

Certificate

We certify that the technical documentation of below mentioned products (Medical Devices according to the council directive 93/42/EEC as amended (2007/47/EC))

ARYAMED INDIA
 ADDRESS : POCKET-H, PLOT NO.5,SECTOR 4,
 BANANA INDUSTRIAL COMPLEX, NEW DELHI-110039,INDIA

has been assessed and found to Comply with requirements of

CE

For the PRODUCTS AS PER ANNEXURE -1

Complies with the applicable requirements of the products (Medical Devices according to the council directive 93/42/EEC as amended (2007/47/EC))

Referring to the intended use, the Certification body has conducted with successful results the review of the Manufacturer's Technical documentation of the certified product according to the above mentioned Directive and appropriate Harmonized European Standards.

This Certificate is issued under the following conditions:-

- Complies with the applicable requirements of the Directive 93/42/EEC as amended (2007/47/EC) Referring to the intended use, the Certification body has conducted with successful results the review of the Manufacturer's Technical documentation of the certified products according to the above mentioned Directive and Appropriate Harmonized Standards.
- This Certificate is issued under the following conditions:-

Certificate Number : **2111CE12**

Original Certification Date : 16-11-2021
 Certificate Expiration Date : 15-11-2024





International Quality Services (IQS)
 20-22 Wexford Road London, N17 9JL United Kingdom of Great Britain and Northern Ireland | Website: www.iqs-uk.net

The validity of this certificate is contingent upon the condition that the client has understood & shall abide by contract agreement, certification agreement for certification services and logo rules as given on our website www.iqs-uk.net. The client is required to check the above certificate details at our above mentioned website and inform us in case of any discrepancy at our email id info@iqs-uk.net.



ARYAMED INDIA

Corporate Office:



Plot No.38 & 51, Ground Floor
Indl. Area Complex, Bhorgarh Indl. Area
Sector-L, Bawana DSII DC, Phase-2
Bhorgarh, New Delhi-110040, INDIA



aryamedindia@gmail.com



+91-9211111881, 9899001881



www.aryamedindia.com

GUARANTEE

Every "ARYAMED" Equipment is thoroughly tested by our qualified & experienced Engineers before dispatch and carry a Guarantee of Free Repair/Replacement of any part of proven defective manufacture within one year from the date of supply.